
NEW JERSEY GEOLOGICAL SURVEY

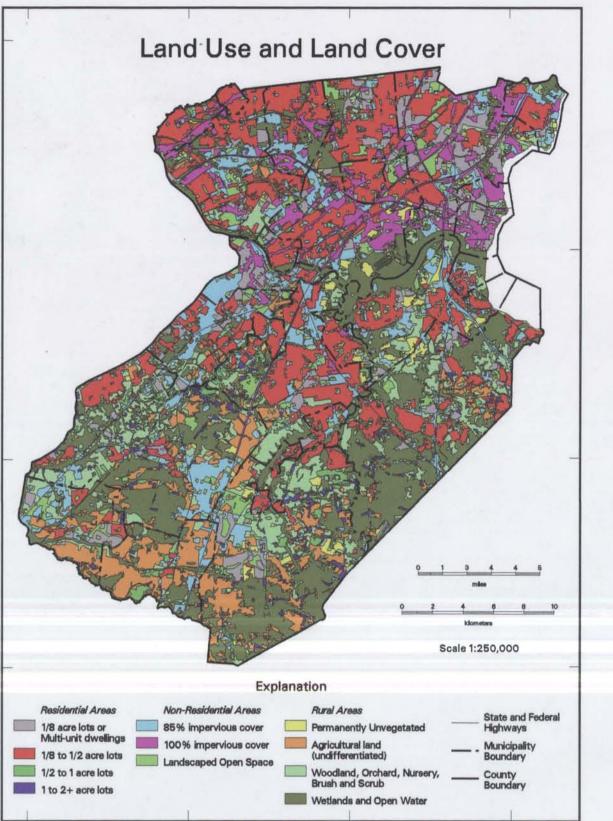

terrain unit (ITU) coverage, produced for the New Jersey Department of Inc. (ESRI, 1993). The land use and land cover coverage extracted from the integrated terrain unit uses a modified U.S. Geological Survey (USGS) land use and land cover classification system (Anderson, and others, 1976), and reflects field conditions from 1986. This classification system is fundamentally different

The residential, industrial, commercial, institutional, and mixed use areas did not correlate between the two systems. The residential areas in the USGS system were mapped to a single category (Residential) while the industrial, commercial, institutional, and mixed use areas were mapped to multiple categories (Commercial and Service, Industrial, Transportation, Communication and Utilities, Industrial and Commercial Complexes, Mixed Urban or Built Up, Other Urban or Built Up). The NJGS scheme required the following four residential categories: 65% impervious cover (1/8 acre lots or multi-family dwelling units); 33% impervious cover (greater than 1/8 acre up to and including 1/2 acre lots); 23% impervious (greater than 1/2 acre up to and including 1 acre lots); and 17% impervious (greater than 1 acre up to and including 2 acre lots). The industrial, commercial, institutional, and mixed use areas only required 2 categories: Landscaped commercial/industrial/institutional/mixed-use areas (approximately 85% impervious); and Unlandscaped commercial/industrial/ institutional/ mixed-use areas (approximately 100% impervious). Without direct correlation between the two systems, it was necessary to translate these areas to two polygons with generic codes.

Mylar overlay maps were produced at 1:24,000 scale for each USGS 7.5-minute quadrangle of Middlesex County. NJGS staff remapped the residential areas and industrial, commercial, institutional, and mixed use areas to the NJGS system using the 1991 orthophotoquadrangles. All other areas were checked against the same orthophotoquads. As advised in Charles and others (1993), only areas of five acres and greater were mapped. Areas were field checked when land use were then digitized for each quadrangle and compiled to produce the land use

Ground-Water Recharge

Ground-water recharge is defined as water which infiltrates into the ground to a depth below the root zone. This definition does not differentiate between recharge to aquifers and recharge to non-aquifers. This methodology of calculating ground-water recharge is based on a monthly soil-water-budget

The following is exerpted from Charles and others (1993, p. 4-6) and is provided as background to explain the method used to construct the ground-water

"A soil-water budget estimates recharge by subtracting water that is unavailable for recharge (surface runoff and evapotranspiration) from precipitation (the initial budget amount). Any deficit in water storage in the unsaturated zone (soil-moisture deficit) must be made up before ground-water recharge can occur. The resulting equation is:

recharge = precipitation - surface runoff - ET - soil-moisture deficit

Although recharge to ground water is a highly variable and complex process, a soil-water budget can account for the principal mechanisms and provide reasonable recharge estimates. Appendix 7 [in Charles and others, 1993] provides a comprehensive technical explanation of the data and calculations used to develop the method, and how the results were adapted for the mapping procedure. Briefly, the method was developed as follows:

An expanded form of equation 1 was used to simulate monthly recharge for all reasonable combinations of climate, soil and land use and land cover found in New Jersey. Recharge was based on statewide ranges of precipitation and the principal factors that control surface runoff and evapotranspiration. Data on five environmental factors were necessary for the simulations: precipitation, soil, land-use/land-cover, surface runoff, and evapotranspiration.

Daily precipitation data were selected from 32 of the 126 National Oceanic and Atmospheric Administration (NOAA) climate stations in New Jersey on the basis of their even geographic distribution and complete record. Thirty years of data were used in the simulations because it is the standard length


of climate record for comparison purposes (Linsley, Kohler, and Paulhus, 1982). The soil data were hydrologic-soil group, soil type, depth and type of root barriers, and available water capacities. These were developed from a database of New Jersey soils maintained by the state SCS office. These data were used

in the surface runoff and evapotranspiration calculations.

Land use and land cover is an important consideration that was used in both surface runoff and evapotranspiration calculations. A land use and land cover classification of 14 categories * * * was designed specifically for this method. The classification system was derived largely from a system used in the Soil Conservation Service (SCS) curve-number method for calculating runoff (U.S. Department of Agriculture, 1986). The number of categories was reduced to reflect useful long-term land-use distinctions and limitations inherent in mapping from aerial photos.

Surface runoff was calculated using a modification of the SCS curve-number method. Because the curve-number method is designed for calculating runoff from the largest annual storms, adjustments were made so the results more accurately reflect runoff observed in New Jersey from smaller storms * * *. These adjustments are applicable only to recharge calculations and are important because frequent smaller storms contribute most of the long-term

Evapotranspiration was computed for each of the 32 climate stations using a

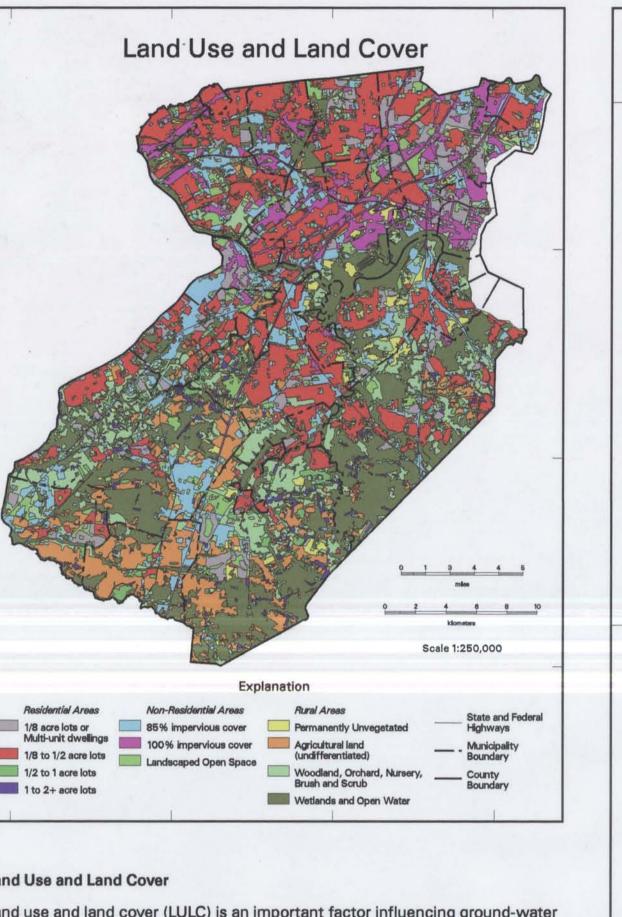

74° 37′ 30″

40° 37′ 30″

Land use and land cover (LULC) is an important factor influencing ground-water recharge and must be classified in a manner that will be meaningful to ground-water recharge studies. A land use and land cover classification system that is specifically tailored for such studies was developed from a classification system outlined in the Soil Conservation Service's (SCS) Technical Release 55 (TR-55) "Urban hydrology for small watersheds" (U.S. Department of Agriculture, SCS, 1986). This system is outlined in New Jersey Geological Survey Report GSR-32, "A Method for Evaluating Ground-Water-Recharge Areas in New Jersey" (Charles and others, 1993). The method uses a modification of the SCS approach that reduces the original 64 land use and land cover categories to 14 in order to provide for unique land use and land cover conditions in New Jersey, to reflect long-term land use and land cover distinctions, and allow for limitations inherent in mapping from aerial photos with little field verification. Ten of the 14 categories of the NJGS system were used to classify the land use and land cover in Middlesex County. The land use and land cover map was produced using the methodology outlined in Charles and others (1993) and modified for implementation on a geographic information system (GIS).

Land use and land cover is also a component of the Middlesex County integrated Environmental Protection (NJDEP) by Environmental Systems Research Institute, from that used by the NJGS. However, most USGS categories correlate to NJGS categories and allow a partial translation between the two schemes.

and land cover was unable to be determined from the photoquads. The changes

Environmental Protection

method developed by Thornthwaite and Mather (1957). Evapotranspiration

(R-factor X C-factor X B-factor) - R-constant (2)

calculations incorporated the effects of land-use/land-cover. Adjustments

were made to the evapotranspiration results so they would more closely

approximate evapotranspiration from naturally-watered, open, vegetated

The basin factor (B-factor), a constant of 1.3, was assigned by calibrating

of soil characteristics and land use/land cover found in New Jersey.

predicted volumetric ground-water recharge to reported basin-wide stream

Climate factors were developed for every municipality * * *. Recharge factors

and recharge constants * * * were developed for every possible combination

There are four primary qualifiers of the method. First, the method estimates

soil-water budget to estimate ground-water recharge is that all water which

the method addresses only natural ground-water recharge. Intentional and

unintentional artificial recharge, withdrawals of ground water, and natural

because the direction of flow between ground-water and surface water or

wetlands depends on site specific factors and can also change seasonally * * *. Incorporating these complexities was beyond the resources of this

discharge are not addressed. Fourth, wetlands and water bodies are

eliminated from the analysis before recharge mapping is begun. This is

This ground-water-recharge map was created using the method presented in

Charles and others (1993), and modified for GIS implementation. The method

requires information about 4 components: (1) land use and land cover, (2) soils,

(3) municipal boundaries, and (4) wetlands and open water. Land use and land

integrated terrain unit coverage of the county (ESRI, 1993). Municipal boundaries

cover was mapped as indicated above. Soils were obtained from the county

migrates below the root zone recharges ground water (Rushton, 1988). Third,

ground-water recharge (recharge to both aquifers and non-aquifers) rather

than aquifer recharge. Second, a fundamental assumption when using a

areas in New Jersey * * *.

annual ground-water recharge =

(R-constant):

Scale 1:100,000

Ground-Water Recharge

were taken from a coverage in the NJDEP GIS database (Thornton and Plunkett,

wetlands and open-water were obtained from both the county integrated terrain

unit (ESRI, 1993) and newly available freshwater wetlands coverages produced

coverage. Like-ranked polygons were combined and shading applied. Wetlands,

1987) This coverage was modified to include the municipal C-factors. Finally,

by MARKHURD, Inc. for NJDEP (MARKHURD, 1990-1994). All four of these

components were combined. The simulations showed that average annual recharge could be estimated on The combined coverage data were then downloaded to a spreadsheet program the basis of climate, soil characteristics and land use and land cover. The results were incorporated in a simple formula which allows one to calculate and the R-factor and R-constant was determined by cross-referencing the soils average annual recharge in inches per year from a climate factor (C-factor), and land use and land cover coding of each polygon. Recharge in inches per year a recharge factor (R-factor), a basin factor (B-factor) and a recharge constant was then calculated for each polygon using equation 2. The recharge values were ranked using volumetric ranking as described in Charles and others (1993). Each recharge rank represents 20% of the total recharge volume. Once the recharge was ranked this data was then uploaded and joined to the combined

open water, and hydric soil polygons were not shaded.

Wetlands, Open Water and Hydric Soils The unshaded areas on the map, which include wetlands, open water and hydric soils, were not ranked because their relationship with ground water cannot be determined using this approach. The ground-water-recharge model does not encompass the complexities of these areas. The direction of flow between ground and surface water or wetlands is dependent upon site specific variables which can change seasonally. Furthermore, hydric soils were not ranked because they are generally recognized as ground-water-discharge areas or areas of predominately saturated soils (Charles and others, 1993). In other words, wetlands, open water and hydric soils can be either recharge or discharge areas, both or neither, or neutral in relationship with ground water. This relationship depends upon many factors and may change unpredictably over the course of time. Site specific studies are required to determine the relationship to ground water for the areas of interest. Such investigations are beyond the resources of this study and should be undertaken by interested parties in concert with the ground-water-recharge mapping outlined in Charles and others (1993).

Aquifer Recharge Potential

Aquifer recharge or recharge to water-bearing, geologic units is defined by this study as the ground water which reaches the water table in the uppermost geologic unit that has a thickness of 50 feet or greater. The water-table aquifer rankings map was combined with the ground-water recharge map to produce a map of aquifer recharge potential. This produced a composite ranking of 25 possible aquifer recharge potentials. This shows the relationship between ground-water-recharge areas and the underlying water-table aquifer.

Ground-Water-Recharge and Aquifer Recharge Potential for Middlesex County, New Jersey

Mark A. French

74° 37′ 30″

74° 37′ 30″

40° 37′ 30″

40° 22′ 30″

40° 15'

Explanation

A (21" to 26")

B (19" to 20")

C (13" to 18")

D (1" to 12")

E (0 inches)

wetlands, open water

and hydric soils

State and Federal

— -- Municipal Boundary

— County Boundary

Ground-water-recharge rates vary independently across the underlying aquifers High-ranked ground-water-recharge areas can be found on low-ranked aquifers. This indicates infiltration or recharge at higher rates than the aquifer can absorb This excess recharge provides water to wetlands and for stream baseflow. When these high rank ground-water-recharge areas are located over high-ranked aquifers, this indicates an area where recharge rates are matched more closely to the aquifer's ability to absorb this water. These represent important areas for protection of aquifer recharge.

This map incorporates two additional assumptions besides those outlined in the ground-water-recharge methodology as presented by Charles and others (1993). These assumptions are: (1) Any lateral flow of ground water along boundaries of differing hydraulic conductivity has not been incorporated into this map. (2) The influence of topography on recharge is considered to have been addressed in the ground-water-recharge methodology as presented in Charles and others (1993).

Acknowledgements

The following individuals and organizations are acknowledged for their assistance in the development of this map: Robert Canace, Jeffrey Hoffman, Richard Dalton, William Graff, Thomas Seckler, Scott Stanford, Ronald Pristas, Maryann Scott, ShayMaria M. Silvestri, and the staff of the Bureaus of Ground-Water Resources Evaluation and Geology and Topography of the N. J. Geological Survey; Paul Caris and William Kruse of the Middlesex County Planning Board; Emmanuel Charles of the U. S. Geological Survey; Joanne Vogel of the Natural Resources Conservation Service, U. S. Dept. of Agriculture; and the staff of the Bureau of Geographic Information Analysis, N. J. Dept. of Environmental Protection.

Glossary of selected terms

Aquifer: a geologic formation, part of a formation or group of formations that can supply economic quantities of water to wells.

Aquifer Recharge Potential of Middlesex County, N.J.

Aquifer recharge: the process of addition of water to an aquifer through infiltration. Aquifer-recharge area: the land surface area that allows recharge to an aquifer.

with C-factor, R-factor, and R-constant, to yield an estimate of average annual ground-water recharge. Baseflow: that part of stream flow (discharge) derived from ground water seeping into the stream. C-factor: a climate-sensitive constant developed by NJGS that consists of the ratio of average annual precipitation to the average annual (simulated) potential evapotranspiration. C-factor is used in a formula, in conjunction with B-factor, R-factor and R-constant, to yield an estimate of average annual

B-Factor: a calibration constant developed by the NJGS to calibrate ground-water-recharge estimates

to statewide, stream-baseflow-based recharge estimates. B-factor is used in a formula, in conjunction

Evapotranspiration: loss of water from a land area through transpiration from plants and evaporation

Geographic Information System (GIS): a computer-based, integrated spatial and tabular database used

for spatial analysis, data storage and query, and computer-assisted mapping. Ground water: subsurface water that is in the saturated zone.

Polygon: an enclosed area on a map which has information associated with it.

Ground-water recharge: the process of addition of water to the saturated zone. Ground-water-recharge area: the land surface area that allows recharge to the saturated zone. Infiltration: the downward movement of water into and through soil.

R-constant: a land-use/land-cover and soil-group dependent constant developed by NJGS. R-constant is used in a formula, in conjunction with B-factor, C-Factor and R-factor, to yield an estimate of average annual ground-water recharge. R-factor: a land-use/land-cover and soil-group dependent factor developed by NJGS. R-factor is used

annual ground-water recharge. Rank: a label that establishes a relative position for example "very high," "high," "moderate," "A,"

in a formula, in conjunction with B-factor, C-Factor and R-constant, to yield an estimate of average

Root zone: the zone from the land surface to the maximum depth penetrated by plant roots.

Saturated zone: a subsurface zone in which all voids are filled with water. Soil-water budget: an accounting of the water flow in and out of a soil unit by calculation of precipitation, surface runoff, evapotranspiration and changes in soil-moisture. In a soil-water budget the excess of water can be considered available for ground-water recharge.

Anderson, 1976, A Land Use and Land Cover Classification System for Use with Remote Sensing Data: U. S. Geological Survey Professional Paper 964

Explanation

Aquifer Recharge Rank

₽ B (19 to 20)

ව C (13 to 18)

Recharge in inches per year

Aguifer Rank

BCDE

wetlands, open water

and hydric soils

State and Federal

— -- Municipal Boundary

County Boundary

Charles, E. G., Behroozi, C., Schooley, J., and Hoffman, J. L., 1993, A Method for Evaluating Ground-Water-Recharge Areas in New Jersey: N. J. Geological Survey Report GSR-32 Daniel, C. C., III, 1989, Statistical Analysis Relating Well Yield to Contruction Practices and Siting of Wells in the Piedmont and Blue Ridge Provinces of North Carolina: U. S. Geological Survey

Drake, A. A., Jr., Volkert, R. A., Monteverde, D. H., Herman, G. C., Houghton, H. F., Parker, R. A., Dalton, R. A., 1995, Geologic Map of New Jersey: Northern Bedrock Sheet: U. S. Geological Survey Open File Report 94-178, map. Linsley, R. K., Kohler, M. A., and Paulhus, J. L. H., 1982, Hydrology for Engineers (3rd ed.): New York,

Owens, J. P., Sugarman, P. J., Sohl, N. F., Parker, R. A., Houghton, H. F., Volkert, R. A., Drake, A. A., Jr., Orndorf, R. C., 1995, Geologic Map of New Jersey: Central Sheet: U. S. Geological Survey Open File Report 95-253, map. Rushton, K. R., 1988 Numerical and Conceptual Models for Recharge Estimation in Arid and Semi-Arid Zones, in Simmers, I., ed., Estimation of Natural Groundwater Recharge: Boston, D. Reidel Publishing, pp. 223-238

Sloto, R. A., Cecil, L. D., Senior, L. A., 1991, Hydrogeology and Ground-water Flow in the Carbonate Rocks of the Little Lehigh Creek Basin, Lehigh County, Pennsylvannia: U. S. Geological Survey Water-Resouces Investigations Report 90-4076, pg. 15.

Stanford, S., oral communication, Thicknesses of Surficial Units in Middlesex County: N. J. Geological

Thomthwaite, C. W., and Mather, J. R., 1957, Instructions and Tables for Computing Potential vapotranspiration and the Water Balance: Publications in Climatology, v. 10, no. 3, pp. 185-311


Thornton, L., and Plunkett, B., 1987, stmun, municipal boundaries of the state of New Jersey: N. J. Dept. of Environmental Protection.

Environmental Systems Research Institute, 1993, miditum, integrated terrain unit for Middlesex County:

MARKHURD, Inc., 1990, FWW, delineations and classifications of freshwater wetlands in New Jersey:

New Jersey Geological Survey, Bureau of Ground-Water Resources Evaluation, 1994, NJGS Wells U. S. Department of Agriculture, Soil Conservation Service, 1986, Urban Hydrology for Small Watersheds (2nd ed.): Soil Conservation Service Technical Report 55.


U. S. Geological Survey-Water Resources Div., 1994, Ground Water Site Index (GWSI): U. S. Geol.

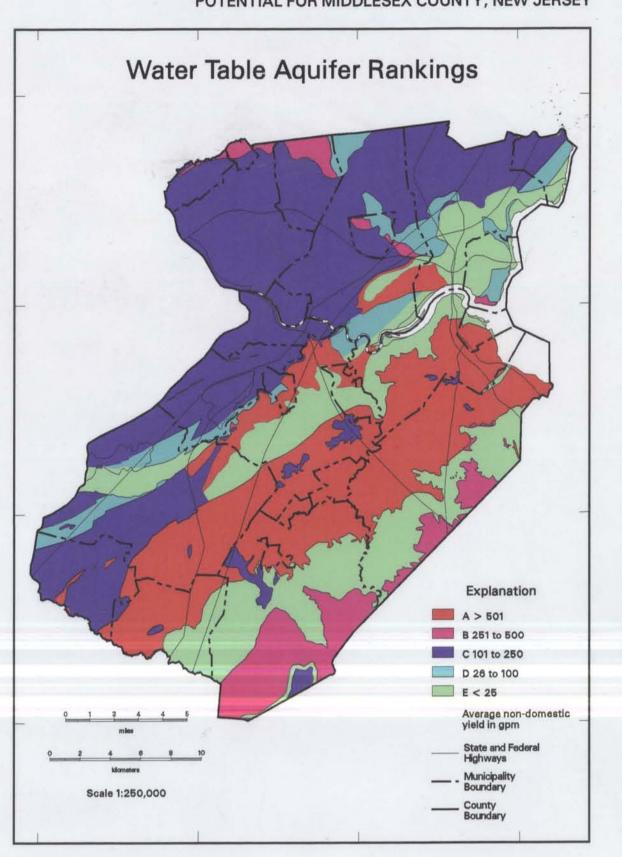

40° 37′ 30″

For the purposes of this study an aquifer is defined as the first water-bearing geologic unit that has a thickness of 50 feet or greater and is under water-table conditions Only water-table aquifers are discussed here. The bedrock geology used to define these aquifers is from the unpublished Geologic Map of New Jersey: Northern Bedrock (Drake and others, 1995) and Central (Owens and others, 1995) Sheets. The surficial geology is from unpublished maps by

To create a system to rank these aquifers the NJGS analyzed statewide aquifer and well data that included well yield, hydraulic conductivity, specific capacity, transmissivity, and storativity. Well yield data from a selected subset of non-domestic wells were used because they provided the most comprehensive data and were the most representative of the potential water-yielding ability of the aguifer (Sloto and others, 1990). Well yield data were obtained from NJGS project databases and from the USGS Ground Water Site Index (GWSI) database. Statistical analysis showed that the arithmetic mean or average of the well yield could be used to adequately assess the aquifer. The ranges of yields for the rankings are selected based upon "breaks" in the data and corresponding plot of the mean. These ranges were further refined after discussions with NJGS hydrogeologic staff. The five statewide rankings are as follows:



Once these ranges were established, statewide rankings were determined for each aquifer. If well-yield data were not available for an aquifer, it was ranked based upon its lithologic characteristics compared to the ranked aquifers, and the combined professional judgment of the NJGS geologic and hydrogeologic

The relative rank of the aquifers in Middlesex County were created by retrieving well yield data from the county and calculating the arithmetic means for each aquifer with three or more values. The statewide rankings were then applied to the results. All aquifers which did not have county well data were assigned the

The Lockatong, a very-fine grained, gray to black formation consisting of argillite, mudstone, and argillaceous sand and siltstone, presented an exception to this ranking method. There were only 3 Middlesex County well yield values from this formation. The arithmetic mean of this data sample indicated a "C" ranking which is high for this formation. Upon further examination of the county and statewide data it was discovered that the sample included the maximum statewide yield value for the formation. This high value and the small sample size led to a higher than expected mean for the formation in comparison with both the statewide data and data from other counties. Therefore, the Lockatong has been given a "D" ranking as indicated in the table below.

Below is a table containing the data used to rank the county's aquifers:

Middlesex County Aquifer Data Summary

r	Avg Well Yield (gpm)	No. of values	Standard Deviation	Aquifer Rank	
wick (Passaic)	220	43	212	C	
gton(Raritan)	531	109	451	A	
tong	131	3	114	D	
idge(Magothy)	562	111	306	A	
(undiferentiated)	408	3	559	В	
ton	224	8	246	C	
Potomac Parita	and Magathy				

*PRM: Potomac, Raritan and Magothy

Brunsv Farring Lockati Old Brid PRM* Stockt

The locations of these aquifers were delineated using the most recent geologic data for Middlesex County (Drake and others, 1995, and Owens and others, 1995). However, the aquifer names reflect an older geologic nomenclature that corresponds to the geology in the following way: (1) part of the Brunswick Formation now corresponds to the Passaic Formation, (2) the Farrington Sand corresponds to a member of the Raritan Formation and (3) the Old Bridge Sand corresponds to as a member of the Magothy Formation. The undifferentiated PRM (Potomac-Raritan-Magothy) grouping was too broad a characterization to be useful and data from this unit was not used for this study.

Where surficial formations reach a thickness of 50 feet or greater, they constitute the water-table aquifer (Stanford, oral communication). Where this occurred, these formations were given an aquifer rank based upon the professional judgment of NJGS geologists and hydrogeologists. Where the surficial units were less than 50 feet thick they are considered to be part of the underlying aquifer. The surficial geologic units in Middlesex County are Pleistocene glacial deposits (till and stratified drift) and Pliocene fluvial deposits (Pennsauken Formation) and are ranked as follows:

> Aguifer Rank stratified drift glacial till

Pennsauken Fm.

The resulting county-wide aquifer rankings were applied to a combined and modified geologic coverage. The polygons of like rank were combined and